


产品特点：

- 1.工作频率高
- 2.测试寿命长
- 3.高频性能稳定
- 4.驻波及损耗低

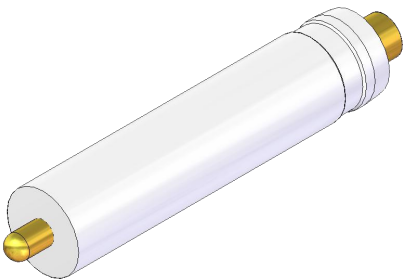

电气性能：

技术指标	参数
频率 (Frequency Range)	DC-4Ghz
阻抗 (Impedance)	50Ω
驻波 (VSWR)	<1.3@DC-4GHz
插入损耗 (Insertion loss)	<0.2dB@4GHz
接触电阻 (Contact resistance)	≤20 MΩ



© 2013 Pearson Education, Inc. or its affiliate(s). All rights reserved. This publication is protected by copyright. Any unauthorized distribution or reproduction of this work is illegal. All other rights reserved.

机械性能:

名称	材质	镀层
针轴 (Needle shaft)	铍铜	镀 4 μ 金
针管 (Needle)	Brass	镀 1.27 μ 金
绝缘体 (Insulator)	PTFE	N/A
弹簧 (Spring)	SWP-B	Gold plated
测试寿命 (Test Life)	≥20000 cycles	
温度范围 (Operating Temperature Range)	-40℃~125℃	
行程及力值 (Stroke and force)	最大行程 2.4mm，工作行程 2mm,弹簧力值 F=2.5±1N.	

产品外观尺寸:

